


T-Pad 1500

Thermally Conductive Pad

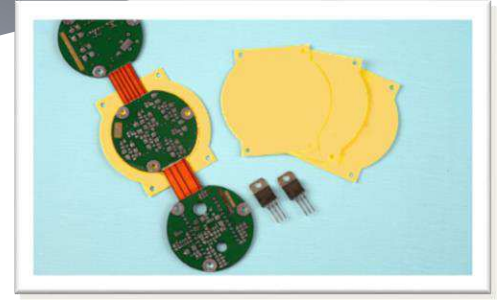

T-pad 1500 is a highly durable pad, formulated to thermally connect hot electronic devices to a cold wall or nearby metal work whilst also maintaining electrical insulation.

The cold flow action of **T-Pad 1500** and its soft surfaces on both sides, deliver a good thermal wet out between mating surfaces, this obviates micro air voids for reduced thermal resistance and improved thermal performance. **T-Pad 1500** can be supplied in die-cut shapes for use in a wide range of electronic applications.

Features

- Electrically insulating and moderate thermal performance properties
- Thermal conductivity = 1.5 W/mK
- Requires mounting pressure via spring, metal clip or clamp

Availability

- Standard thickness of 0.23mm
- Available as custom die-cut shapes and standard sheet sizes of 300mm x 300mm
- Available in roll format to specified width, custom shape adhesive parts can also be supplied on rolls
- Low tack adhesive can be coated on one side

Benefits

- Guaranteed electrical isolation
- Fills micro air voids between device and mating metal work at the interface. Improving thermal performance
- Maintains temperature stability over a wide range of temperatures

Recommended Uses

- Any heat generating surface to metal that requires good thermal performance and electrical insulation
- Cooling power devices mounted to a heatsink or chassis in PSUs
- Thermally coupling TO220 and TO247 devices to heatsinks

Typical Physical Properties


Property (unit)	Test Method	T-Pad 1500
Colour	Visual	Yellow
Thermal Conductivity (W/mK)	ASTM D5470	1.5
Hardness (Shore 00)	ASTM D2240	70
Thermal Impedance (K-cm ² /W @ 69KPa)	ASTM D5470	2.90
Operating Temp. (°C)	-	-40 to +200
Flame Rating	UL94	V-0



Electrical and Mechanical Information

Property (unit)	Test Method	T-Pad 1500
Tensile Strength (N/mm)	ASTM D412	20
Elongation (%)	ASTM D412	10
Breakdown Voltage (Volts AC)	ASTM D149	>6000
Volume Resistivity (Ω-cm)	ASTM D257	2.0 x 10 ¹³



www.universal-science.com

UK  +44 (0) 1908 222 211

IT  +39 (02) 395 613 61 FR  +33 (0) 1602 00276



This material is often used in these industries:

